



交点釘打ち詳細 ※上部も同様とする

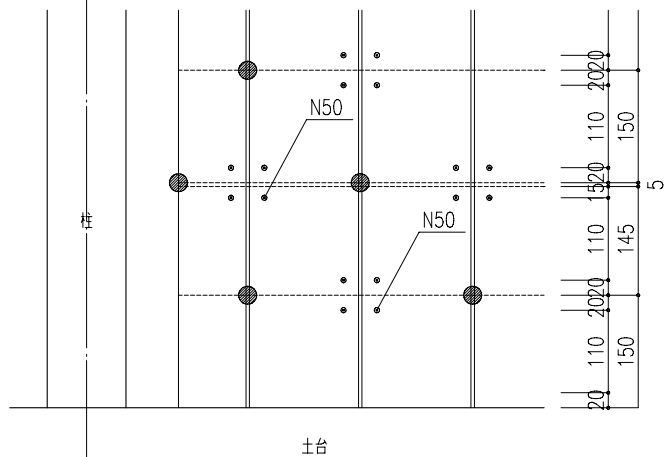

交点釘打ち詳細(裏面) ※上部も同様とする

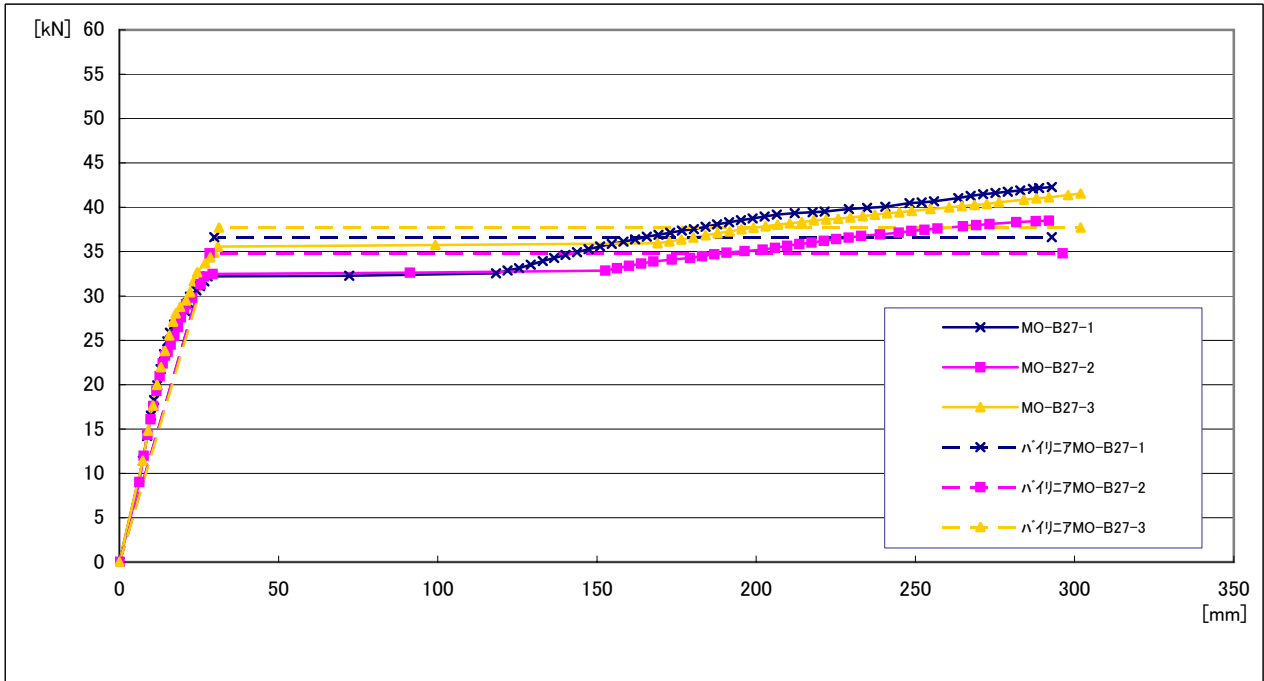

	降伏耐力 P_y (kN)	終局耐力 P_u (kN)	D_s	$P_{ux}(0.2/D_s)$ (kN)	最大耐力 (kN)	$P_{max} \times 2/3$ (kN)	特定変形角 1/150rad.時耐力
B27-1 (2011/04/12)	31.10	36.62	0.30	24.37	42.28	28.19	22.10
B27-2 (2011/04/13)	31.34	34.80	0.29	23.81	38.57	25.71	22.10
B27-3 (2011/04/13)	34.37	37.72	0.31	24.43	41.55	27.70	21.66

ばらつき係数の算出

標準偏差	1.49			0.28		1.07	0.21
平均値	32.27			24.20		27.20	21.96
変動係数CV	0.05			0.01		0.04	0.01
50%下限値K	0.471			0.471		0.471	0.471
ばらつき係数	0.98			0.99		0.98	1.00

ばらつき係数を乗じた値 (平均値 x ばらつき係数)

	降伏耐力 P_y (kN)			$P_{ux}(0.2/D_s)$ (kN)		$P_{max} \times 2/3$ (kN)	特定変形角 1/150rad.時耐力
B27	31.57			24.07		26.70	21.86

短期基準せん断耐力 P_o (kN)	壁倍率 $P_o / 1.82 / 1.96$
21.86	6.13